




## Auger with Auger Drill

| | |
|---|---|
| Size | ϕ5.9-23.6 inch |
| Weight | 154 Lb |
| Depth | 0-39.4 inch |
| Motor Displacement | 14 oz/r |
| Drill Specifications | ϕ5.9 ϕ8.7 ϕ11.8 ϕ15.7 ϕ17.7 ϕ23.6 inch |
| Length | 50.2 inch |
| Torque | 553.2 lb·ft |



## Mixing Bowl

| | |
|---|---|
| Size | 21*28 inch |
| Weight | 115 Lb |
| Rated Load | 265 Lb |
| Motor Displacement | 14 oz/r |
| Max Mixing Volume | 4.24 $ft^3$ |

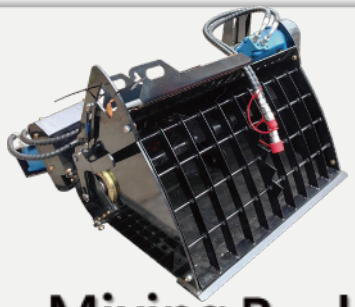

## Mixing Bucket

| | |
|---|---|
| Size | 28*34*23 inch |
| Weight | 364 Lb |
| Rated Load | 441 Lb |
| Maximum Capacity | 3.18 $ft^3$ |



## 4 in I Bucket

| | |
|---|---|
| Size | 42*24*19 inch |
| Weight | 231 Lb |
| Rated Load | 243 Lb |
| Bucket Capacity | 4.24 $ft^3$ |



## Stone Bucket

| | |
|---|---|
| Size | 41*30*14 inch |
| Weight | 159 Lb |
| Pitch of Teeth | 3.4 inch |





## Hydraulic Breaker

| | |
|---|---|
| Size | 42*24*12 inch |
| Weight | 353 Lb |
| Drive Flow | 4.0-6.6 gal/min |
| Operating Pressure | 150 Bar |
| Strike Frequency | 800-1400 b·p·m |
| Diameter of Brazing Rod | 1.57 inch |




## Leveler

| | |
|---|---|
| Size | 33*43*18 inch |
| Weight | 110 Lb |
| Horizontal Soil Area | 10 $ft^2$ |



## Fork

| | |
|---|---|
| Size | 44*35*28 inch |
| Weight | 194 Lb |
| Effective Length | 36 inch |
| Max. Fork Width | 33 inch |
| Rated Load | 265 Lb |

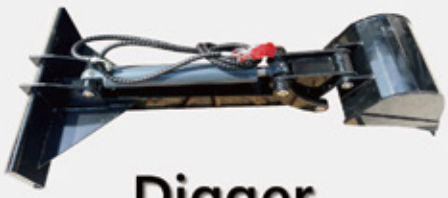

## Digger

| | |
|---|---|
| Size | 51*26*27 inch |
| Weight | 243 Lb |
| Digging Depth | 61 inch |
| Bucket Capacity | 1 $ft^3$ |



## Hydraulic Grapple

| | |
|---|---|
| Size | 38*32*23 inch |
| Weight | 276 Lb |
| Max. Opening Angle | 88° |
| Capacity | 14 $ft^3$ |
| Rated Load | 243 Lb |





## Angle Blade

| | |
|---|---|
| Size | 43*26*20 inch |
| Weight | 265 Lb |
| Tilt Angle | ±30° |
| Blade Width at Max. Tilt Angle | 34 inch |



## Wood Chipper

| | |
|---|---|
| Size | 35*30*31 inch |
| Weight | 276 Lb |
| Diameter of Broken Branches | 0.4-2 inch |
| Inlet Size | 28*24 inch |



## Log Splitter

| | |
|---|---|
| Size | 68*20*38 inch |
| Weight | 397 Lb |
| Diameter of Split Wood | 12 inch |
| Length of Split Wood | 22 inch |
| Operating Pressure | 160 Bar |



## Log Splitter (Horizontal)

| | |
|---|---|
| Size | 67*10*21 inch |
| Weight | 353 Lb |
| Diameter of Split Wood | 12 inch |
| Length of Split Wood | 20 inch |
| Operating Pressure | 160 Bar |
| Thrust | 11 Ton |



## Backhoe

| | |
|---|---|
| Size | 63*45*51 inch |
| Weight | 525 Lb |
| Max. Digging Depth | 39 inch |
| Max. Digging Radius | 96 inch |
| Bucket Capacity | 0.5 $ft^3$ |
| Bucket Lifting Force | 33 KN |





## Sweeper

| | |
|---|---|
| Size | 36*56*21 inch |
| Weight | 313 Lb |
| Roller Brush Diamcter | 2 inch |
| Cleauing Width | 41 inch |



## Tiller

| | |
|---|---|
| Size | 53*22*18 inch |
| Weight | 265 Lb |
| Working Width | 39 inch |
| Working Deigh | 2.4-5.9 inch |
| Nomber of Blades | 38 Pieces |



## Brush Cutter

| | |
|---|---|
| Size | 49*51*18 inch |
| Weight | 375 Lb |
| Cotting Reight | 20 inch |
| Curting Width | 47 inch |
| Nomber of Blades | 2 Pieces |



## Lawn Mower

| | |
|---|---|
| Size | 50*54*21 inch |
| Weight | 406 Lb |
| Cutting Reight | 1-4 inch |
| Curting Wiuth | 42 inch |
| Nomber of Blades | 3 Pieces |
| Flow Rate | 6.6 gal/min |

## Harley Rake



| | |
|---|---|
| Size | 41.3*48-43*17.72 inch |
| Weight | 385.8 Lb |
| Working Pressure | 16 Mpa |
| Working Flow | 8-13 gal/min |





**Electric swing-head snow blower**

| | |
|---|---|
| Size | 43*34*38 inch |
| Weight | 300 Lb |
| Hourly Sow Blowing Capacity | 40-50 t |
| Max. Throwing Thicknces | 13 inch |
| Clearing Width | 39 inch |
| Max. Throwing Distance | 26-39 ft |
| Throving Adjustment Augle | 0-360° |



**Stump Grinder (No Electric Swing) Front-to-Back Swing**

| | |
|---|---|
| Size | 31*33*18 inch |
| Weight | 220 Lb |
| Max. Stump Height | 20 inch |
| Max. Cutting Depth | 12 inch |
| Number of Teeth | 12 Pieces |



**Stump Grinder (Electric Swing) Side-to-Side Swing**

| | |
|---|---|
| Size | 31*33*18 inch |
| Weight | 265 Lb |
| Max. Stump Height | 20 inch |
| Max. Cutting Depth | 12 inch |
| Number of Teeth | 16 Pieces |




| | |
|---|---|
| Size | 24*47*44 inch |
| Weight | 628 Lb |
| Working Width | 40 inch |
| Working Pressure | 14-21 Mpa |
| Working Flow | 10-16 gal/min |





## Vibratory Roller

| | |
|---|---|
| Size | 17*42*34 inch |
| Weight | 573 LB |
| Effective working width | 36 inch |
| Dru diameter | 18 inch |
| Vibration frequency | 75HZ |
| Excitation force | 15KN |

## High dump bucket




| | |
|---|---|
| Size | 26*43*16 inch |
| Weight | 256 Lb |
| Number of Lifting Cylinders | 2 |
| Lifting Height | 20 inch |
| Bucket Capacity | 4 $ft^3$ |

## Trencher



| | |
|---|---|
| Size | 63*25*29 inch |
| Weight | 331 Lb |
| Max. Trenching Depth | 31 inch |
| Single Trenching Width | 6 inch |
| Chain Speed | 420 ft/min |

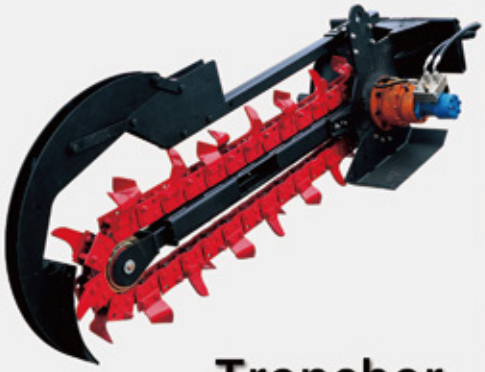

## Trencher

| | |
|---|---|
| Size | 86.6*29.9*32.5 inch |
| Max. Trenching Depth | 47.2 inch |
| Single Trenching Width | 5.9 inch |
| Recommended Flow | 13.2 - 21.1 GPM |
| Working Pressure | 1305 PSI |
| Max Output Torque | 1475 Lb-ft |
| Motor Model | OMS-130 |
| Fitment | XC1100,V1000 |





| | |
|---|---|
| Size | 23*17*50 inch |
| Effective Width | 47 inch |

## Snow pusher



## Forestry Winch

| | |
|---|---|
| Size | 23*36*21 inch |
| Weight | 331 Lb |
| Pulling Capacity | 2,205 Lb |

## Root Rake Grapple



| | |
|---|---|
| Size | 40.2*21.8*36.8 inch |
| Weight | 451 Lb |
| Rated Load | 2000 Lb |
| Working Width | 40.2 inch |
| Max. hydraulic pressure | 2900 PSI |
| Opening Height | 38 .9 inch |



| | |
|---|---|
| Width | 42.13 inch |
| Weight | 418.9 Lb |
| Heaped Volume | 9.88 $tf^3$ |
| Struck Volume | 6.71 $FT^3$ |

## Hydra Bucket/ Soil Conditioner Bucket





## Vibrating plow

| | |
|---|---|
| Size | 36*25*28 inch |
| Weight | 366 Lb |
| Rated Hydraulic Flow | 2 fl-oz |
| Vibration Frequency | 36Hz |
| Vibrating Force | 68KN |

| Pipe Cutter | | Fiber Optic Cable Cutter | |
|---|---|---|---|
| Tool Weight | 18Lb | Tool Weight | 46Lb |
| Maximum Laying Depth | 21inch | Maximum Laying Depth | 21inch |
| Standard Laying Depth | 19inch | Standard Laying Depth | 18inch |
| Minimum Laying Depth | 15inch | Minimum Laying Depth | 15inch |
| Pipe Diameter (for Laying) | 1 inch | Max. Laying Diameter (Fiber Optic Cable) | 0.4inch |
| Pipe Material | PE | | |



## Side Dump Bucket

| | |
|---|---|
| Total Bucket Length | 63.41 inch |
| Total Bucket Width | 30.41 inch |
| Total Bucket Height | 22.59 inch |
| Bucket Capacity | 7.77 $ft^3$ |
| Bucket Tilt Angle | 68° |
| Weight | 410 Lb |



## 6 Way Dozer Blade

| | |
|---|---|
| Overall width | 43.3 inch |
| Working width (at full 28° tilt) | 38.2 inch |
| Blade height | 23.6 inch |
| Blade length | 34.4 inch |
| Max blade angle (right/left of center) | ±28° |
| Blade up/down angle | ±10° |
| Machine weight | 297.6 Lb |



Hydraulic Clamp

| | |
|---|---|
| Size | 45.31*33.19 inch |
| Weight | 288.8 Lb |
| Max. Clamping Diameter | 5.67 inch |
| Working Press | 2320 psi |
| Clamping Force | 13228~17637 lb |